



For Earth, For Life  
Kubota

# BV

## VARIABLE CHAMBER BALERS BV4160/BV4180/BV5160/ BV5200 FLEXIWRAP

Round balers with a bale diameter up to 2.00m





# MORE VALUE IN YOU





# R BALES



## ***HIGH CAPACITY BALERS WITH INDUSTRY DEFINING BALE DENSITY***

A new generation of variable chamber balers from Kubota, incorporates knowledge built up over many years in the baler business, bringing you an assurance of reliable operation even in the toughest working conditions.

With true multi-crop performance in silage, hay and straw, they incorporate a host of features to make your working day more profitable.



# HIGH CAPACITY BALE



## **Efficient**

High density bales means putting more material into each bale, being it silage, hay or straw. More material into each bale combined with massive bale diameter of up to 2.00m inevitably means reduced production cost in terms of baling and wrapping, with significant reduction of cost for twine, net and stretch film and not to forget the time spent on carting and stacking the bales.

## **Intelligent**

Accurate control of the bale pressure is essential to achieve correct bale density. Every crop is different - and with Intelligent Density 3D you get to choose what's best for your crop conditions. Three separate zones each with a choice of diameter and pressure let you perfectly tailor the structure of the bale to your requirements. Intelligent Density 3D takes the guesswork out of baling.

## **Versatile**

The bale chamber of BV4000 and BV5000 series work well in silage, hay and straw. BV4000 from 0.80m up to 1.65 and 1.80m respectively and BV5000 series offers bale diameter from 0.65m up to 1.65 and 2.00m respectively. The bale diameter is easily adjusted through the control terminal.



### **Kubota BV4160-BV4180**

A step up in power, comfort and reliability – the BV4000 series features everything you need to get the job done, including new Powerbind net and twine binding systems and stylish new shielding design.

Bale Diameter of 1.20 x 0.80 – 1.65/1.80m

### **Kubota BV5160-BV5200**

The defining feature of BV5000 series balers is the ability to produce bales of unrivalled quality in all crop conditions. Efficiency and performance are unmatched, while smart ‘Intelligent density’ allows bales to be tailored to perfectly match all requirements.

Bale Diameter of 1.20 x 0.60 – 1.65/2.00m

### **Kubota BV5160/BV5200 FlexiWrap**

The FlexiWrap offers you the best solution for integrated baling and wrapping in one go. High speed wrapping ensures that wrapping is finished before the next bale is ready – fast and efficient *one man operation*.

Bale Diameter of 1.20 x 0.60 – 1.65/2.00m



# CLEAN UP WITH KUBOTA



*Large diameter roller crop facilitates higher intake speeds.*



*Guide wheels with generous flotation tyres and simple height adjustment.*

## ***HIGH CAPACITY PICK-UP REEL***

The low profile Kubota pick-up provides clean raking performance in all crop conditions. Despite the generous working width, transport width is dependent only on road wheel

specification, thanks to an innovative inboard driveline design, which means there is no need to remove the pick-up guide wheels for road transport.



### **2.00m Wide pick-up - Single fork feeder models**

Featuring four tine bars with centre support bearings, the rugged design provides fast throughput, while the standard fitment of a crop deflector ensures efficient crop flow into the bale chamber.

### **2.2m Extra wide pick-up – Double fork feeder and rotor intake models**

Equipped with five tine bars, each with twin supports along their length and a cam track at either end, the Kubota XL super wide pick-up is specified for assured top performance and long term durability in all conditions.


A large diameter roller crop press provides uniform crop flow, allowing increased intake speeds.



# SUPERIOR INTAKE CA



*Single fork feeder.*

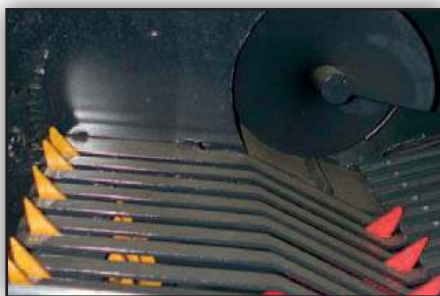

*Dual fork feeder.*

## **Single or Dual Fork Feeder**

BV4160-BV4180 models can be specified with a cost efficient fork feeder intake system. This provides direct feed transfer into the bale chamber, while the wide opening allows almost unrestricted intake capacity. The fork feeder is provided with a crop press to ensure a regular crop flow and it is particularly suited for fragile crops like clover. The optional DuoFeed with its double feed tines ensures high capacity and output, while still safeguarding fragile crop types.



# PACITY

## PowerFeed rotor intake for ultimate capacity

Impressive intake capacity can be achieved with the PowerFeed rotor intake system - handling both wet and dry crops with ease, whatever the conditions. The PowerFeed rotor with its' 14 fully guided rotor fingers proactively forces the material into the bale chamber for higher intake speed and capacity, proving instant bale start and evenly shaped bales.

## SuperCut-14

The SuperCut-14 knife chopping system provides a fast and efficient crop flow into the baler. With a chopping length of 70mm it is the ideal solution for producing tight, dense bales. Improved fermentation and easier feeding of bales are just two of the benefits pre-chopping can provide. Each individual knife is spring protected against foreign obstacles. The knife automatically returns to its work position once the obstacle has passed.

## SuperCut-25

The SuperCut-25 knife pre-chopping system offers the ultimate solution for short chop baling with a chop length of 40mm. The short and precise chop provides dense and airtight bales for the best possible silage quality. The operator can choose to engage 25, 13, 12, 6 or 0 knives, giving maximum flexibility of

operation. For instance it is possible to use half the knives in the morning in difficult and demanding conditions and the remaining half in the afternoon, allowing a full day of baling to be achieved with optimum chop quality.

## Dual Action Knife Protection

The SuperCut-25 knife system is fitted with dual action protection against foreign objects. Each knife is individually spring protected and can move in two directions. If a smaller obstacle hits the knife, it will pivot backwards without losing cutting quality. If a larger obstacle hits the knives they can pivot downwards into a safe position. The knife will automatically return to working position once the obstacle has passed.

## Parallelogram DropFloor system for easy unblocking

Whichever rotor or pre-chopping intake system you choose, your baler (\*) comes equipped with the new Parallelogram drop floor system, which brings faster and easier clearing of blockages from the comfort of the tractor cab. This patented system not only lowers the rear edge of the drop floor as per traditional systems, but also provides additional space under the front section of the floor, where the blockage is more likely to occur.

(\*) Not available on BV4160 F/  
BV4160 FD/BV4180 F/BV4180 FD




PowerFeed intake system.




SuperCut-14.




SuperCut-25.

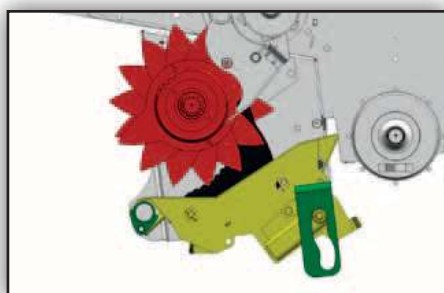

Drop Floor in working position.

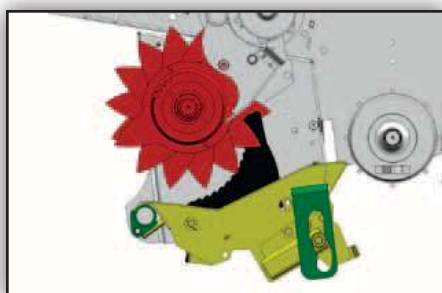

Drop Floor in mid position.

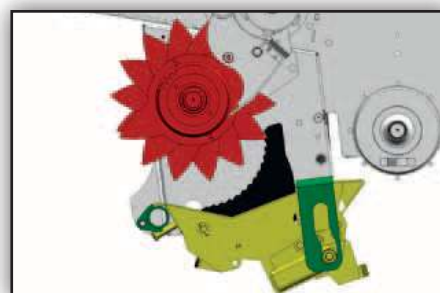

Drop Floor in fully lowered position.

**Easier removal of all blockage types = More productive time spent baling**



# FAST AND EFFICIENT T




## Great Looking Bales - Time after Time

You're sure to leave a field of great looking bales every time you finish a job. Kubota's front mounted net and twine systems ensure neat and tidy looking bales that are tightly wrapped. This ensures perfect storage and easy handling of the bales.



*Twin tube fast operating twine binding system.*

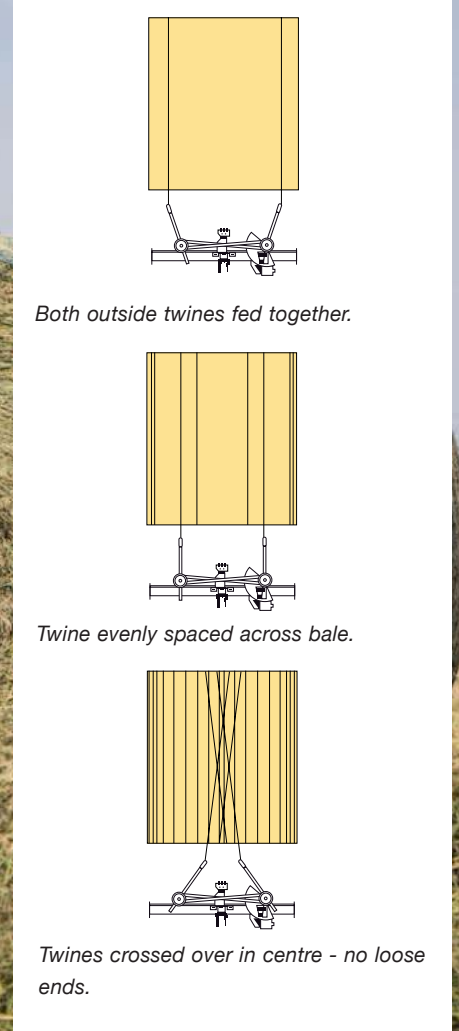

*Both outside twines fed together.*

*Twine evenly spaced across bale.*

*Twines crossed over in centre - no loose ends.*

## Twine Tying


Automatic twine tying with the fast acting double tube system means simultaneous binding of both edges of the bale, reducing binding time to a minimum. Over crossing of twines in the centre of the bale provides no loose ends at the end of the binding cycle. The system is fully user programmable to make sure you make the best looking bales in all crop conditions.



# WINE AND NET WRAP



*The very low loading height and the very easy threading of the system mean minimum downtime and maximum time baling.*

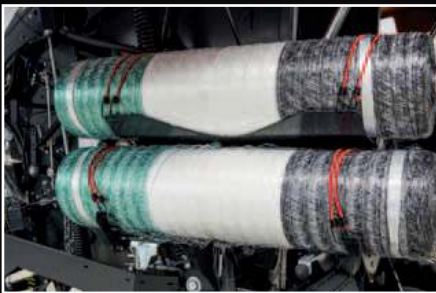

*Convenient easy access storage for net and twine for long working days.*



*The PowerBind net wrap system allows the net to extend past the edge of the bale.*


## **PowerBind Net Wrap**

The BV series comes with the patented PowerBind net wrap system. The system has been simplified in a number of ways compared with traditional systems, with feed rollers having been completely eliminated. Additionally PowerBind provides one of the fastest net wrap actions available. This means minimum downtime and maximum time baling.


The net is fed directly into the bale chamber by an injection arm in a flat movement angle keeping the net tight at all times and providing accurate and extremely reliable net injection.

The net is continuously retained by the injection arm. When the bale is 90% complete the injection arm moves forward, ready for the net injection. This adds to reliability and productivity as no time is spent picking up the net. In fact the PowerBind is one of the fastest net wrapping solutions available today, adding more uptime.


In addition PowerBind offers very low loading height, for maximum convenience and time saving. To replace the empty roll just swing out the shaft and replace it with a new roll.

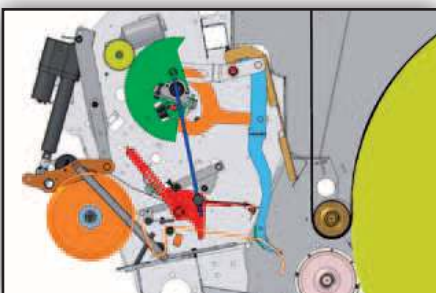

*When the bale is 90% complete the injection arm moves forward ready for the net injection.*

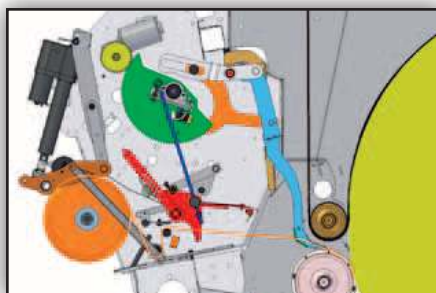

*When the bale is finished the injection arm instantly places the net into the bale chamber. Once net is injected, the brake moves down on to the net roll to tension the net.*

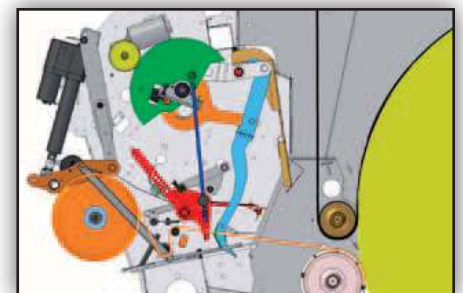

*During the wrapping phase the feeder arm moves back to its waiting position. Once the bale is wrapped the knife is activated, cutting the net.*



# EVERYTHING UNDER C



## **IsoMatch Tellus GO\* – Compact ISOBUS Terminal**

IsoMatch Tellus GO is a full Isobus terminal able to control all Isobus machines in a very simple way. The compact design makes it easy to integrate in the tractor cab. Tellus GO is equipped with a 7-inch touch screen

allowing perfect machine set-up and control. With hard keys combined with the rotary switch on right hand side, for direct access to main functions while driving. Control of implements has never been so easy.



# CONTROL



## Focus 3

New Focus 3 has been designed for easy operation. The colour display is showing baling information at a glance. All baler settings and functions are easily accessed by 'softkeys' putting you in full control from the tractor cab.

Following functions are operated with the Focus 3 control terminal:

- Bale diameter adjustment
- Current bale diameter
- Left & Right driving indicators
- Twine or net tying selection
- Twine and net tying adjustment
- Tying information during cycle
- Manual or automatic tying mode selection
- Bale counter
- Density adjustment (when optional proportional valve fitted)

## ISOBUS (option)

All Variable chamber baler models can be optionally specified with full ISOBUS compatibility, enabling direct connection to an ISOBUS tractor.

As well as direct connection to an ISOBUS equipped tractor, ISO specified machines are optionally available with either Tellus GO or IsoMatch Tellus terminals.



## IsoMatch Tellus Terminal\*

The IsoMatch Tellus is a virtual terminal offering two Interface screens in one terminal. The large 12" easily programmable touch screen offers ergonomic use and is designed for long days of operation. Due to the increasing number of functionalities

that can be added to a machine, such as cameras, the operator can use the baler interface in the top screen and a camera display in the bottom screen, to monitor finished bales. Another possibility is to use the baler interface in the top screen and the tractor interface screen at the bottom.

(\*) These fully ISO terminals can be fitted on variable chamber balers, provided units are factory ordered with Isobus compatibility option.




# WELL-SHAPED DENS

## KUBOTA BV4160-BV4180



A combination of 5 belts and front rollers provides dense bales with a soft core and a easy bale start.

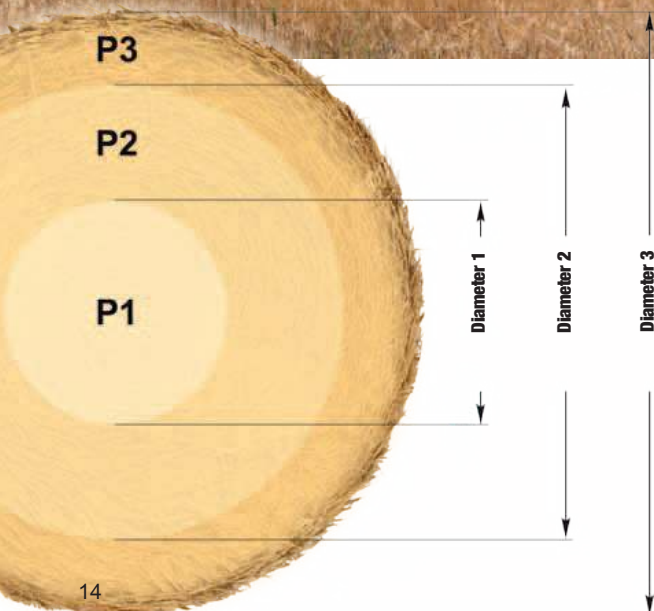

Pre-selection of bale density for each zone of the bale: core, mid and edge.\*

Diameter (D) and pressure (P) can be adjusted in three stages using the control terminal.\*

\* Optional proportional valve Required.

### Silage, Hay or Straw

The BV4160 and BV4180 produce great quality bales in silage, hay and straw. The two versions offer bale diameters from 0.80m up to 1.65m and 1.80m respectively.

The bale diameter is easily adjusted from the control terminal. The chamber is set to provide dense bales with a moderate core and tight outer layer, while pressure setting can be adjusted manually.



# E BALES

## HOW THE BALING CHAMBER WORKS




The BV4000 bale chamber is equipped with a combination of three rollers and five wide laced belts. This mixed chamber ensures a smooth bale start whatever the intake system, offering smooth bale rotation and reduced crop loss, even in dry conditions.

The two aggressive front rollers that come in contact with the crop are constantly cleaned by scraper rollers and are designed to perform well in all conditions. They ensure instant and efficient bale start with every type of crop.

The small pre-chamber at the start of the bale formation ensures well-shaped and dense bales with a moderate core and tight outer layers.

As the bale grows, the belt tensioning arm is subjected to steadily increasing resistance from two hydraulic cylinders and a spring tensioner. As the bale diameter grows, so does the bale's density.

The result is a very firm bale with a moderate core. Straw bales will be more tolerant to poor weather conditions, while silage bales will maintain their shape for improved stacking and easier handling.

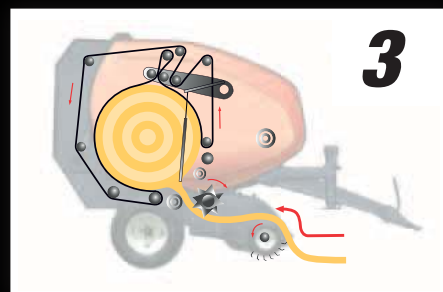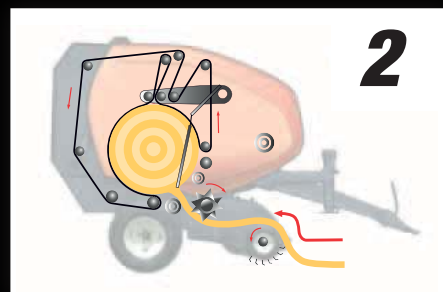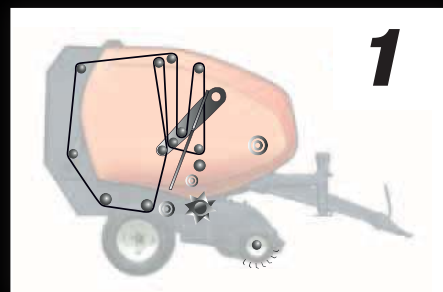

Main bale chamber drive is by heavy duty 1 1/4" pitch chain for longer lifetime and reduced maintenance.



Automatic chain lubrication is standard with lubrication activated continuously at a pre-determined level for each individual chain.



The split drive gearbox ensures that power is distributed evenly, reducing wear and power requirement.




# INTELLIGENT DENSIT

## KUBOTA BV5160-BV5200



**Intelligent Density 3D with 3 pre-selected bale density settings making it very easy to choose the correct bale density in different crops.**




10%

Baling dry straw and want the heaviest bales possible? Maximum pressure is set in every zone.



30%

Baling hay? Soft centre core to let the bale breath is set, with gradually increasing pressure towards the outer layer.




60%

Baling wet silage? Pressure is reduced in the centre and mid zones.

Pre-selection of bale density for each zone of the bale: core, mid and edge.

Diameter (D) and pressure (P) can be adjusted in three stages using the control terminal.

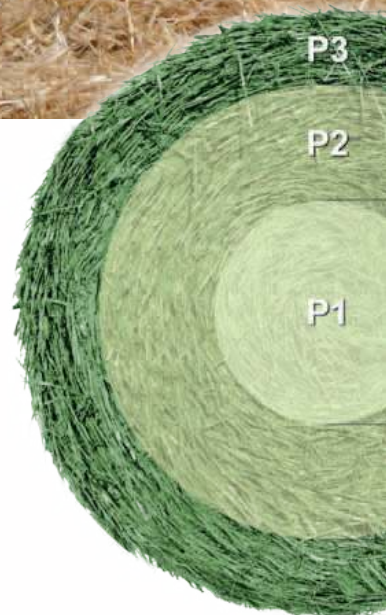



# Y 3D





## HOW THE BALING CHAMBER WORKS

The Intelligent Density bale chamber offers a combination of 3 rollers and 5 endless belts, offering smooth bale rotation and reduced crop loss, even in dry conditions.

The two aggressive front rollers that come in contact with the crop are constantly cleaned by a scraper and are designed to perform well in silage. They ensure instant and efficient bale start with immediate bale formation in all crop conditions.

As the bale grows, the belt tensioning arm is subjected to steadily increasing resistance from two hydraulic cylinders and a spring tensioner. So as the bale diameter grows, so does the bale's density.

The result is a very firm bale with a moderate core. Straw bales will be more tolerant to poor weather conditions, while silage bales will maintain their shape for improved stacking and easier handling.

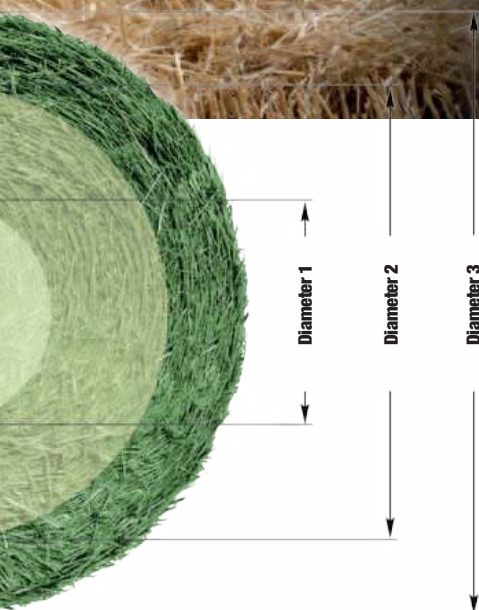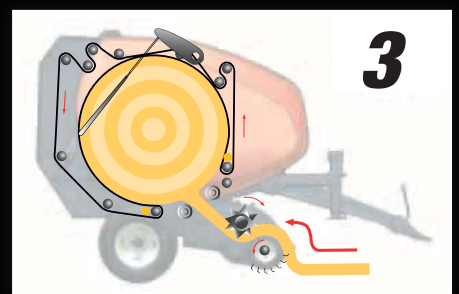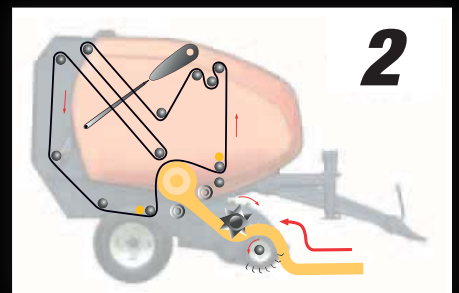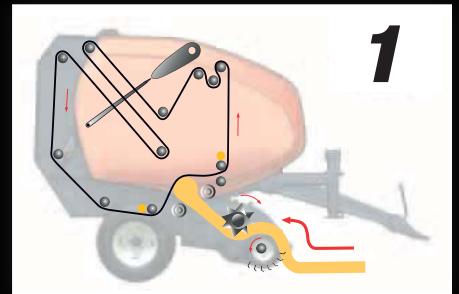

The Kubota BV5160 and BV5200 are fitted with 5 durable endless belts without joiners offering smooth running and low maintenance.



The two front rollers with self-cleaning scrapers are designed to work well in silage and provide instant bale formation.



# INTEGRATED BALER WR

## *KUBOTA BV5160 - BV5200 FLEXIWRAP*



### **A One-Man Baling and Wrapping Combination**

The Kubota FlexiWrap combines high density bales, fast and accurate bale transfer with a high speed twin satellite wrapper. It is the ideal solution for a one-man operation.

It incorporates the Kubota BV5160 or BV5200 with a twin satellite wrapper, all firmly mounted onto a strong and durable chassis with tandem axles.

This combination is designed for working in demanding conditions, and the unique bale transfer solution ensures trouble free operation, even on steep slopes.

### **Fast and Accurate Bale Transfer**

Once the net is applied to the bale the wrapping table is transferred to the tailgate of the baler unit, ready to receive the finished bale. When the tailgate opens the bale is dropped

directly onto the wrapping table (no interfering steps from baler to wrapping table). This provides a very safe bale transfer with no risk of the bale rolling off the wrapping table, even when working in very hilly conditions.

When the bale is onto the wrapping table it is transferred quickly to the satellite wrapper, and wrapping starts instantly.



# UPPER COMBINATION



Once the net is applied to the bale the wrapping table is transferred to the tailgate of the baler.



The bale is dropped directly onto the wrapping table.



As soon as the bale is transferred away from the baler, the tailgate automatically closes, and baling of the next bale can start.



The wrapping table moves very fast to the pre-stretchers and wrapping starts instantly.

## High Speed Wrapping

The wrapping table with 4 endless belts and rollers carries and rotates the bale evenly during wrapping with no risk of film damage. The twin pre-stretchers ensure high speed wrapping, so the wrapping process will finish on time before the new bale is ready. The pre-stretchers are positioned close to the bale, to limit the amount of air trapped under the film during wrapping.

Once the bale is wrapped, it can be unloaded automatically or manually during formation of the next bale. The manual option gives the driver the possibility to drop the bale where most suitable, for instance so bales are all dropped in line for easy pick-up. The low mounted wrapping table ensures gentle unloading of the bales.

In addition the Kubota FlexiWrap can be fitted with a bale on end kit. The bale is tipped off gently on its end, where the highest number of film layers is applied.



# HEAVY DUTY DESIGN

## KUBOTA BV5160 - BV5200 FLEXIWRAP



### Strong and Durable Chassis Design

The FlexiWrap baler wrapper combination is firmly mounted onto a strong and durable chassis. Load and weight are evenly distributed for maximum stability, for instance thanks to the low position of the wrapping table. The tandem axle with 500/50-17 tyres provides very good stability when operating in the field or when running on the road.



*Twin satellite wrapper with 2 pre-stretchers and 4 endless belts for fast and stable wrapping.*



*The extra stretch films are lowered hydraulically for easy change.*





*Bale-on-end kit is available as option. During transport the kit is automatically transferred into a safe position inside the wrapping unit.*



*Quick and safe transport.*



*Height adjustable drawbar.*



# SPECIFICATIONS

Kubota Models	BV4160 F	BV4160 FD	BV4160 R	BV4180 F	BV4180 FD	BV4180 R	BV5160 R
<b>Weight and dimensions</b>							
Length (m)	4.48	4.48	4.48	4.48	4.48	4.48	4.48
Width (m)	2.52	2.52	2.52	2.52	2.52	2.52	2.52
Height (m)	2.70	2.70	2.70	2.78	2.78	2.78	2.70
Weight (kg)	2650	2700	2840	2700	2750	2890	2990
<b>Bale chamber</b>							
Diameter min. (m)	0.80	0.80	0.80	0.80	0.80	0.80	0.60
Diameter max. (m)	1.65	1.65	1.65	1.80	1.80	1.80	1.65
Width (m)	1.20	1.20	1.20	1.20	1.20	1.20	1.20
Bale formation	5 belts+3 rollers						
Belt width (mm)	5/220	5/220	5/220	5/220	5/220	5/220	5/220
Belts - endless type	-	-	-	-	-	-	•
Greasable roller bearings (central)	•	•	•	•	•	•	•
Bale ramp	0	0	0	0	0	0	0
<b>Pick-up</b>							
Working width (cm)	200	220	220	200	220	220	220
Tine rows (nb)	4	5	5	4	5	5	5
Tine spacing (mm)	60	60	60	60	60	60	60
Crop deflector	•	•	-	•	•	-	-
Roller crop press	-	-	•	-	-	•	•
Pneumatic gauge wheels	•	•	•	•	•	•	•
<b>Intake</b>							
Fork Feeder	•	-	-	•	-	-	-
DuoFeed Fork Feeder	-	•	-	-	•	-	-
PowerFeed Rotor	-	-	•	-	-	•	•
SuperCut 14 knives	-	-	-	-	-	-	-
SuperCut 25 knives	-	-	-	-	-	-	-
Knife protection (on each knife)	-	-	-	-	-	-	-
Knife group selection	-	-	-	-	-	-	-
Drop floor	-	-	•	-	-	•	•
<b>Driveline</b>							
11/4" chains	•	•	•	•	•	•	•
W-A PTO shaft	•	•	•	•	•	•	•
Shear bolt protection	•	•	-	•	•	-	-
Cam clutch protection	0	0	•	0	0	•	•
<b>Binding (PowerBind)</b>							
Twine only variant	8 balls	8 balls	8 balls	8 balls	8 balls	8 balls	8 balls
Net only variant	3 rolls	3 rolls	3 rolls	3 rolls	3 rolls	3 rolls	3 rolls
Net & Twine variant	8 balls+3rolls	8 balls+3rolls	8 balls+3rolls	8 balls+3rolls	8 balls+3rolls	8 balls+3rolls	8 balls+3rolls
<b>Wrapping Unit</b>							
Support rollers / belts (nb)	-	-	-	-	-	-	-
Film pre-stretcher	-	-	-	-	-	-	-
Film cut-and-hold	-	-	-	-	-	-	-
Film roll magazine	-	-	-	-	-	-	-
Bale-on-end kit	-	-	-	-	-	-	-
<b>Operations</b>							
Focus 3 terminal (non Isobus vers. only)	•	•	•	•	•	•	•
Isobus compatibility option	0	0	0	0	0	0	0
IsoMatch Tellus Go (only w/Isobus option)	0	0	0	0	0	0	0
IsoMatch Tellus (only w/Isobus option)	0	0	0	0	0	0	0
Hydraulic outlets	1SA+1DA	1SA+1DA	1SA+1DA	1SA+1DA	1SA+1DA	1SA+1DA	1SA+1DA+R
<b>Wheels and Axles</b>							
11.5/80-15	•	•	-	•	•	-	-
15.0/55-17	0	0	•	0	0	•	•
19.0/45-17	-	-	0	-	-	0	0
500/50-17 (* tandem axle)	-	-	-	-	-	-	0
550/45-22.5	-	-	-	-	-	-	-
Hydraulic brakes	-	-	-	-	-	-	0
Air brakes	-	-	-	-	-	-	0
<b>Others</b>							
Reversible drawbar	•	•	•	•	•	•	•
PTO (rpm)	540	540	540	540	540	540	540
Min. power requirem. (kW/hp)	38/55	38/55	45/64	45/64	45/64	52/70	45/64

• = Standard o = Optional - = Not available



BV5160 SC14	BV5160 SC25	BV5200 R	BV5200 SC14	BV5200 SC25	BV5216 SC14 FlexiWrap	BV5216 SC25 FlexiWrap	BV5200 SC14 FlexiWrap	BV5200 SC25 FlexiWrap
4.48	4.48	4.75	4.75	4.75	7.40	7.40	7.40	7.40
2.52	2.52	2.52	2.52	2.52	2.99	2.99	2.99	2.99
2.70	2.70	2.82	2.82	2.82	2.90	2.90	3.00	3.00
3250	3520	3340	3600	3920	6050	6320	6400	6720
0.60	0.60	0.60	0.60	0.60	0.60	0.60	0.60	0.60
1.65	1.65	2.00	2.00	2.00	1.65	1.65	2.00	2.00
1.20	1.20	1.20	1.20	1.20	1.20	1.20	1.20	1.20
5 belts+3 rollers								
5/220	5/220	5/220	5/220	5/220	5/220	5/220	5/220	5/220
•	•	•	•	•	•	•	•	•
•	•	•	•	•	•	•	•	•
0	0	0	0	0	-	-	-	-
220	220	220	220	220	220	220	220	220
5	5	5	5	5	5	5	5	5
60	60	60	60	60	60	60	60	60
-	-	-	-	-	-	-	-	-
•	•	•	•	•	•	•	•	•
•	•	•	•	•	•	•	•	•
-	-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	-
-	-	•	-	-	-	-	-	-
•	-	-	•	-	•	-	•	-
-	•	-	-	•	-	•	-	•
•	•	-	•	•	•	•	•	•
-	-	-	-	-	-	-	-	-
•	•	•	•	•	•	•	•	•
•	•	•	•	•	•	•	•	•
-	-	-	-	-	-	-	-	-
•	•	•	•	•	•	•	•	•
-	-	8 balls	-	-	-	-	-	-
3 rolls	3 rolls	3 rolls	3 rolls	3 rolls	3 rolls	3 rolls	3 rolls	3 rolls
8 balls+3rolls	-	8 balls+3rolls	8 balls+3rolls	-	8 balls+3rolls	-	8 balls+3rolls	-
-	-	-	-	-	2 / 4	2 / 4	2 / 4	2 / 4
-	-	-	-	-	2	2	2	2
-	-	-	-	-	2	2	2	2
-	-	-	-	-	10	10	10	10
-	-	-	-	-	0	0	0	0
•	•	•	•	•	•	•	•	•
0	0	0	0	0	0	0	0	0
0	0	0	0	0	0	0	0	0
0	0	0	0	0	0	0	0	0
1SA+1DA+R	1SA+1DA+R	1SA+1DA+R	1SA+1DA+R	1SA+1DA+R	1SA+1DA+R	1SA+1DA+R	1SA+1DA+R	1SA+1DA+R
-	-	-	-	-	-	-	-	-
•	•	•	•	•	-	-	-	-
0	0	0	0	0	-	-	-	-
0	0	0	0	0	• (*)	• (*)	• (*)	• (*)
0	0	-	0	0	-	-	-	-
0	0	0	0	0	•	•	•	•
0	0	0	0	0	0	0	0	0
•	•	•	•	•	•	•	•	•
540	540	540	540	540	540	540	540	540
55/75	69/95	50/70	60/80	74/100	55/75	69/95	60/80	74/100



*The company reserves the right to change the above specifications without notice. This brochure is for descriptive purpose only. Some of the items pictured in this brochure are optional and not standard equipment. Please consult your local Kubota dealer for warranty, safety or product information. For your safety, Kubota strongly recommend the use of a seat belt in all applications.*

©2016 Kverneland Group Ravenna S.r.l.

---

The Kubota logo is rendered in a teal color. It features the word "Kubota" in a stylized, rounded font. The letter "K" is particularly large and bold, with a unique shape. The "u" and "b" are also stylized, with the "b" having a rounded bottom. The "o" is a simple circle, and the "t" is a simple vertical bar with a horizontal top. The "a" is a simple shape with a rounded bottom. A registered trademark symbol (®) is located at the bottom right of the logo.